


AW Aufhängeglied

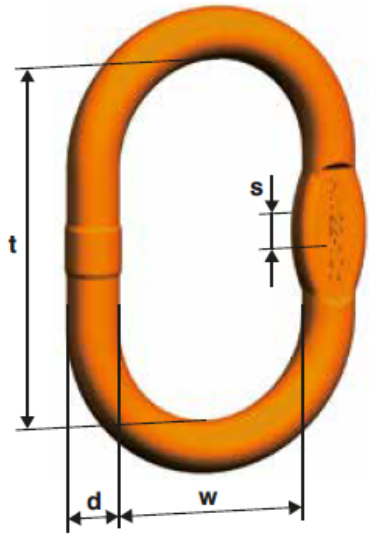

Code	Tragfähigkeit 0 – 45° ¹ [kg]	Verwendbar bis Einfach- haken n. DIN 15401	d [mm]	t [mm]	w [mm]	s [mm]	Gewicht [kg/Stk.]	Aufhängeglied für Ketten- ø I-Strang AW I [mm]	II-Strang AW II [mm]
AW 10	1.400	Nr. 1,6	10	80	50	10	0,14	5	5
AW 13	2.300	Nr. 2,5	13	110	60	10	0,34	6+7	6
AW 16	3.500	Nr. 2,5	16	110	60	14	0,58	8	7
AW 18	5.000	Nr. 5	19	135	75	14	0,92	10	8
AW 22	7.600	Nr. 6	23	160	90	17	1,59	13	10
AW 26	10.000	Nr. 8	27	180	100	20	2,46	16	13
AW 32	14.000	Nr. 10	33	200	110	26	4,04	19	16
AW 36	25.100	Nr. 16	36	260	140	29	6,22	22	19
AW 45	30.800	Nr. 25	45	340	180	-	12,82	26	22
AW 50	40.000	Nr. 32	50	350	190	43	16,60	32	26
AW 56	64.000	Nr. 32	56	400	200	-	23,30	-	32
AW 72	85.000	Nr. 50	70	460	250	-	43,11	-	-