

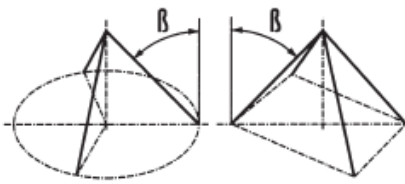


# Höchste Tragfähigkeiten für Anschlagketten

Kette Ø	1-Strang	2-Stränge		3- & 4-Stränge	
					
Neigungswinkel		$0 < \beta \leq 45^\circ$	$0 < \beta \leq 60^\circ$	$0 < \beta \leq 45^\circ$	$0 < \beta \leq 60^\circ$
Lastfaktor	1	1,4	1	2,1	1,5
Ø	Tragkraft [kg]				
6	1.120	1.600	1.120	2.360	1.700
7	1.500	2.120	1.500	3.150	2.240
8	2.000	2.800	2.000	4.250	3.000
10	3.150	4.250	3.150	6.700	4.750
13	5.300	7.500	5.300	11.200	8.000
16	8.000	11.200	8.000	17.000	11.800
18	10.000	14.000	10.000	21.200	15.000
20	12.500	17.000	12.500	26.500	19.000
22	15.000	21.200	15.000	31.500	22.400
26	21.200	30.000	21.200	45.000	31.500
32	31.500	45.000	31.500	67.000	47.500